

CE
ISO9001




Phase



No. of Poles

SOLID STATE RELAY 25 AA

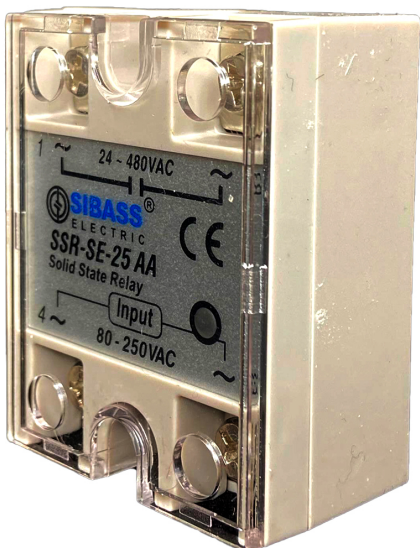

TECHNICAL DETAILS

Frequency	50 Hz
Voltage Type	AC to AC
Current	25A
Mounting	PCB Mounting
Phase	1 Phase
Usage/Application	Electric Panel
Material	ABS (Housing)
Coil Resistance	Yes
Number Of Poles	2 Pole
Turn Of Voltage	3.5 V
Trigger Current	12.0mA
Control Method	Zero Cross
Leakage Current	5mA
Response Time	8.3ms
Insulation Strength	100 Ohms



Dimension

