



HEAVY DUTY CONNECTOR

SE-32-2



CE
ISO9001



Rated
Current



Thread




TECHNICAL DETAILS



Rated Current	16A
Rated Voltage	400/500V
Flammability Acc. To UL94	V0
Degree Of Protection Acc. To Din40 050	IP65
Terminal	Screw terminal
Thread	M25 , PG21





Internal view

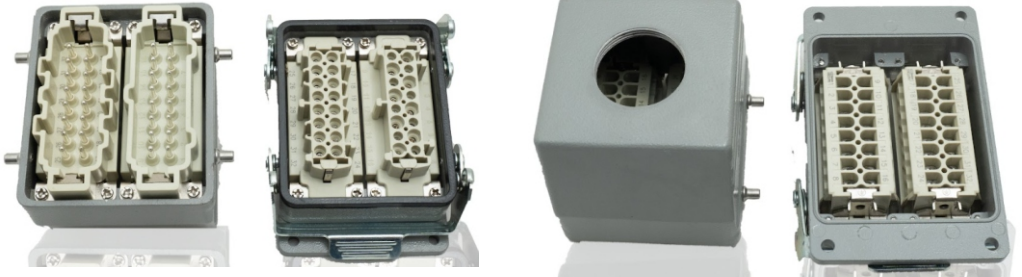

HOOD



HOUSING



DIMENSION DETAILS

HOOD:

A	94
B	82
H	94

HOUSING:

A	110
B	124
E	90
H	33
C	65