



IP68 WATERPROOF CONNECTOR SE 21 SERIES



NUMBER OF CONTACTS	2	3	4	5	5B	5C	7	9	12
Male contact face view									
Rated current (A)	30	30	30	30	30/5	15	15	5	5
Contact diameter (mm)	3	3	3	3	3x2 1x3	2	2	2	2
Rated voltage (AC.V)	500	500	500	500	500	500	500	500	500
Test voltage (AC.V) 1 min	1500	1500	1500	1500	1500	1500	1500	1500	1500
contact resistance (mΩ)	1	1	1	1	1 / 5	2.5	2.5	5	5
Termination	solder/ screw	solder/ screw	solder/ screw	solder/ screw	solder/ screw	solder	solder	solder	solder
Wire size solder (mm ² / AWG)	<4/11	<4/11	<4/11	<4/11	<4/11 <0.785/18	<2/14	<2/14	<0.785/18	<0.785/18
Wire size screw termination (mm ² / AWG)	<1.5/15	<1.5/15	<1.5/15	<1.5/15	<4/11 <0.785/18	<2/14	<2/14	<0.785/18	<0.785/18




Dimension




SE 2110/P

CABLE CONNECTOR

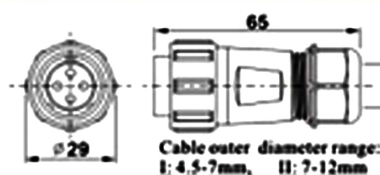

SE 2111/S

IN-LINE CABLE CONNECTOR

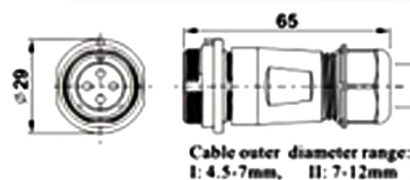

SE 2112/S

PANEL MOUNT
CABLE CONNECTOR

