

CE
ISO9001



Function: 3 input,
1 output



Ambient
Temperature:
-40°C~100°C

MC4 T3 SOLAR PANEL CONNECTOR




TECHNICAL DETAILS

Rated Current	30A
Rated Voltage	1000V DC
Test Voltage	6KV (50Hz, 1Min)
Contact Material	Copper, Tin plated
Insulation Material	PPO
Contact Resistance	<1mQ
Waterproof Protection	IP67
Ambient Temperature	-40°C-100°C
Flame Class	UL94-V0
Suitable Cable	2.5/4/6mm ² (14/12/1 OAWG) cable



Diagram

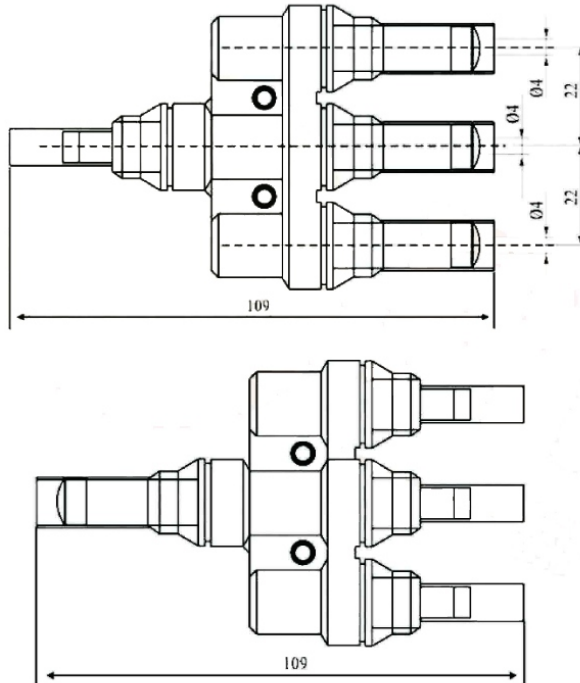

Advantage of MC4 to 3 PV Branch Connector

- High Quality PPO Insulation
- High density | Heat resistant | Flame retardant | Wear resistant
- Self-locking Design MC4 Compatible Connection