



CE
ISO9001




Mechanical durability



Electrical durability

MCCB 250A/3P

TECHNICAL DETAILS

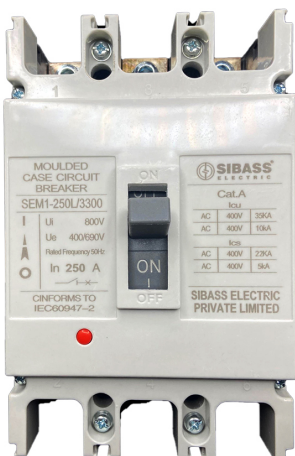

Product or component type	Circuit breaker
Poles description	3P
Protected poles description	3D
Network type	DC / AC
[In] rated current	250 A at 40 °C
[Ue] rated operational voltage	415 V AC 50/60 Hz conforming to EN/IEC 60947-2
Suitability for isolation	Yes conforming to EN/IEC 60947-2
control type	Toggle
Circuit breaker mounting mode	Fixed
[Ui] rated insulation voltage	440 V AC conforming to EN/IEC 60947-2
[Uimp] rated impulse withstand voltage	8 kV conforming to EN/IEC 60947-2
Mechanical durability	25000 cycles
Electrical durability	8000 cycles at 415 V In



Power dissipation per pole

25 W

Mounting support

Backplate

Mounting position

Horizontal and vertical

Flat on the back

Upside connection

Front

Downside connection

Front

Dimension

