



SIBASS PG GLAND




CE
ISO9001

TYPE	THREAD LENGTH L1	ENTRY RANGE D1	ENTRY RANGE D2	CABLE GLAND DIMENSION	LOCKNUT THREAD SIZE D3
SE-PG-07	8	3.5-3.6	7	23-8	16.5
SE-PG-09	8	4.5-7	10.2	25-8	21.5
SE-PG-11	8	5.5-10	11.5	27-8	25
SE-PG-13.5	9	6-12	13.5	28-9	27
SE-PG-16	10	10-14	16.5	30-10	30
SE-PG-21	11	14-18	21	38-11	37.5
SE-PG-29	11	18-25	27.5	42-11	47.5
SE-PG-36	12	25-33	34.5	43-12	58
SE-PG-42	13	30-38	40.5	48-13	65
SE-PG-48	14	34-44	45.5	48-14	70
SE-PG-63	27	42-50	60	13-18	36



TYPE	THREADED ENTRY METRIC	CABLE RANGE Ø	THREAD o.d.c1	PANEL MOUNTING HOLE	THREAD LENGTH C2	SEALING NUT SIZE F	LOCK NUT SIZE A
SE-MG-12	M12 X 1.25	7.6-4.6	12	12.5	8.5	19	18
SE-MG-16	M16 X 1.5	10-6	16	16.5	15	22	22
SE-MG-20	M20 X 1.5	14-9	20	20.5	15	27	27
SE-MG-25	M25 X 1.5	18-13	25	25.5	15	33	33
SE-MG-32	M32 X 1.5	25-18	32	33	15	41	41
SE-MG-40	M40 X 1.5	30-24	40	41	20	50	50
SE-MG-50	M50 X 1.5	39-30	50	51	22	62	61
SE-MG-63	M63 X 1.5	48.5-40	63	64	25	75	15

DIMENSION

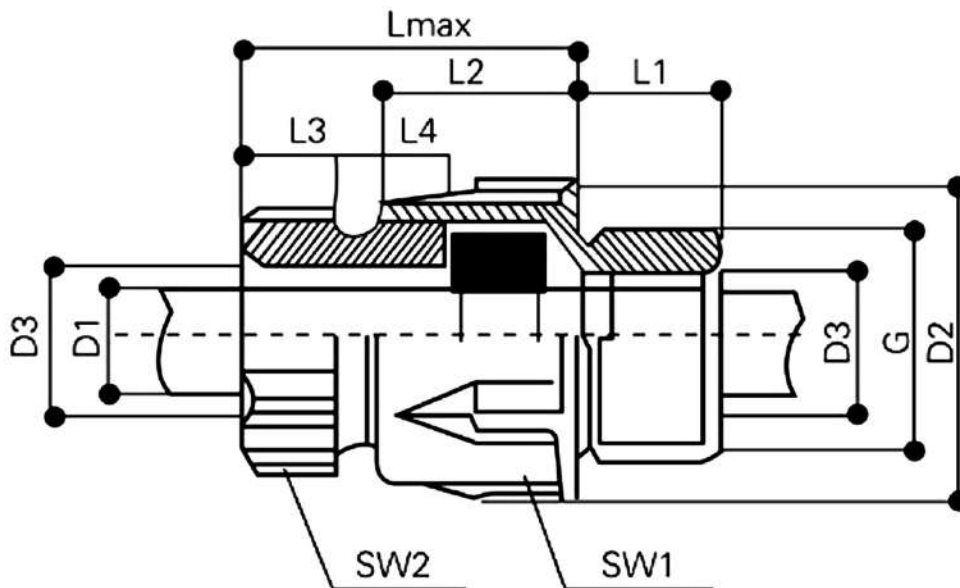

FEATURE

- * Material made from UL nylon 66, 94V-2 and tight ring from rubber.
- * special designation, good strength side and non damage to electric machine.
- * not need to disorganization the fix terminal, cable can be inserted through directly then tighten easy and save time.
- * application used for machinery control box, distribution plate, machine and electrical, etc.