




CE
ISO9001



Screw
Terminals

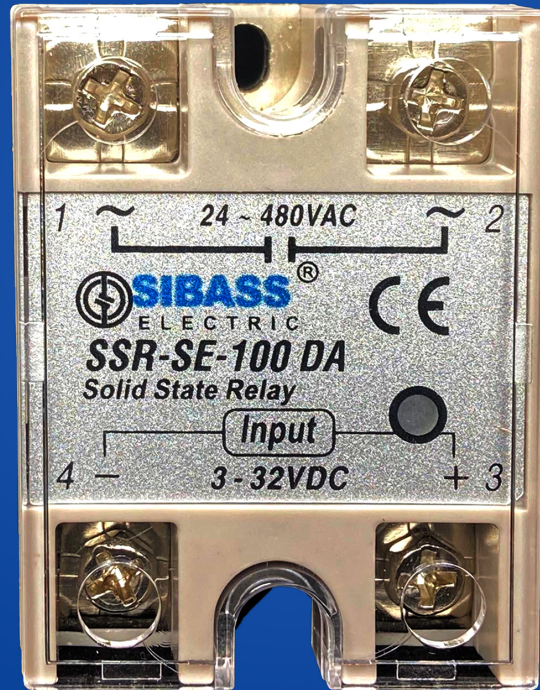

Operating temperature
-30°C ~ 80°C

SOLID STATE RELAY 100 DA

TECHNICAL DETAILS



Model	SSR 100DA
Control voltage	3-32 VDC
Control type	Zero cross(default) or random turn on
Max control current	12 mA
Switch-on voltage	2.8 VDC
Switch off voltage	1.5 VDC
Load voltage	24-480 VAC
Peak load voltage	800 V
Load current	100 A
Max off-state leakage current	2 mA
Max on-state voltage drop	1.5 V



Product dimension	44.8*57.4*28 mm
Dielectric strength(input to output)	4000 V
Dielectric strength(input to output to base)	2500 V
Operating temperature	-30°C~80°C
Certification	CE
Terminals	Screw

Dimension

