




CE
ISO9001



INSULATION RESISTANCE

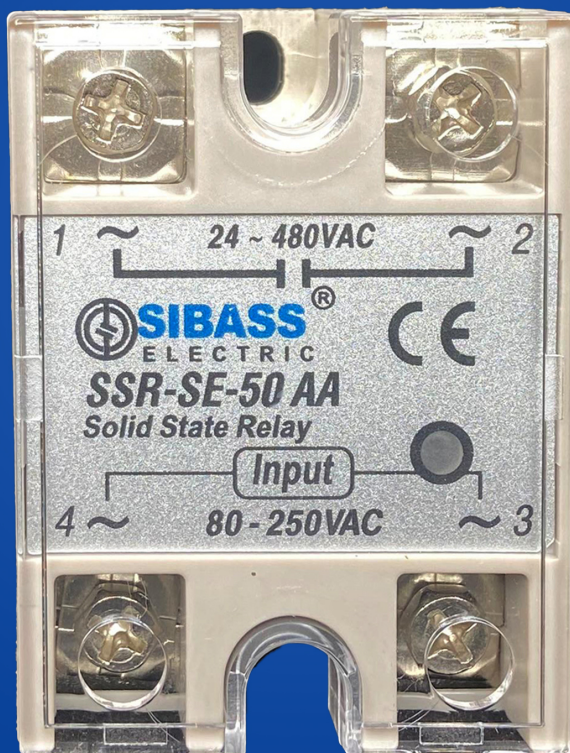

OPERATING VOLTAGE

SOLID STATE RELAY 50 AA

TECHNICAL DETAILS



OPERATING VOLTAGE	80~250VAC50/60Hz
TRIGGER CURRENT	5.0mA / 110VACmax
CONTROL METHOD	Zero Cross Trigger
OPERATING VOLTAGE	75~480VAC
VOLTAGE DROP	1.6V
LEAKAGE CURRENT	< 5.0mA
RESPONSE TIME	ON<20ms, OFF<20ms
INSULATION RESISTANCE	Min. 50M (500VDC)
DIELECTRIC STRENGTH	2500VAC 50/60 Hz for 1 min
AMBIENT TEMPERATURE	-20 ~+80℃
AMBIENT HUMIDITY	45%~85%RH



Dimension

