




CE
ISO9001



Response time

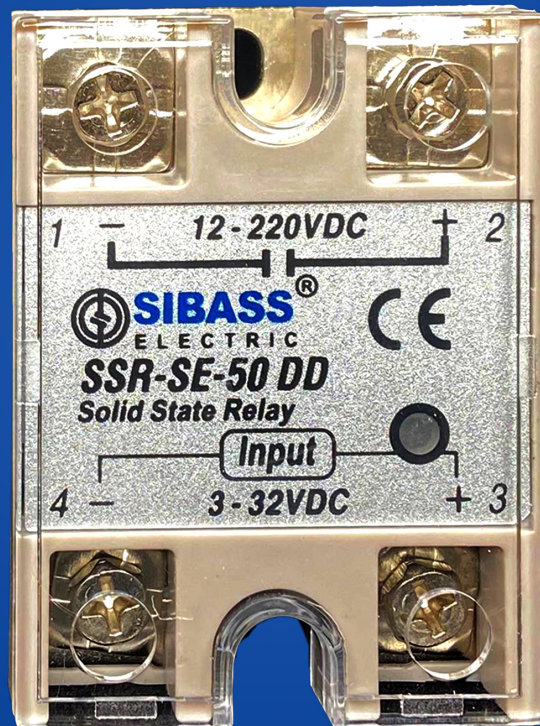

Input voltage

SOLID STATE RELAY 50 DD

TECHNICAL DETAILS



Input voltage	4 ~ 32 VDC
Turn off voltage	< 3.0 VDC
Trigger current	12mA max
Control method	Random
Leakage current	1.0mA
Response time	1.0ms
Input immunity	2KV (EN61000-4-4)
Isolation strength	4 KVrms (EN60950/VDE0805)
Insulation strength	100M / 500VDC (EN60950/VDE0805)
Circumstance	-40 C ~ +80 C; 35 ~ 85%RH
Type	DC to DC



Dimension

