




CE
ISO9001



Load voltage

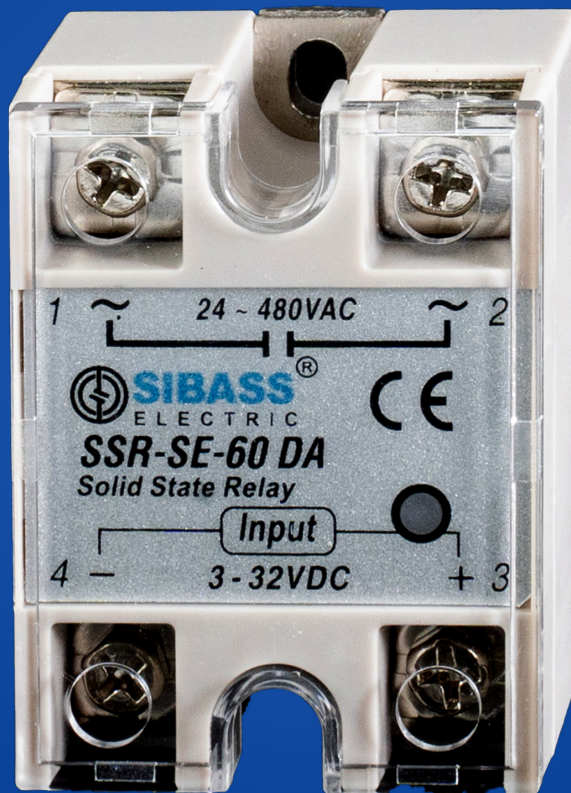

Operating temperature

SOLID STATE RELAY 60DA

TECHNICAL DETAILS



Mode	SSR 60DA
Control voltage	3-32 VDC
Max control current	12 mA
Switch-on voltage	2.8 VDC
Switch off voltage	1.5 VDC
Load voltage	24-480 VAC
Peak load voltage	800 V
Load current	60 A
Max off-state leakage current	2 mA
Max on-state voltage drop	1.5 V
Product dimension	44.8*57.4*28 mm
Dielectric strength(input to output)	100 g
Dielectric strength(input to output to base)	4000 V



Operating temperature

-30°C~80°C

Certification

CE

Terminals

Screw

Dimension

