




CE
ISO9001




Load voltage

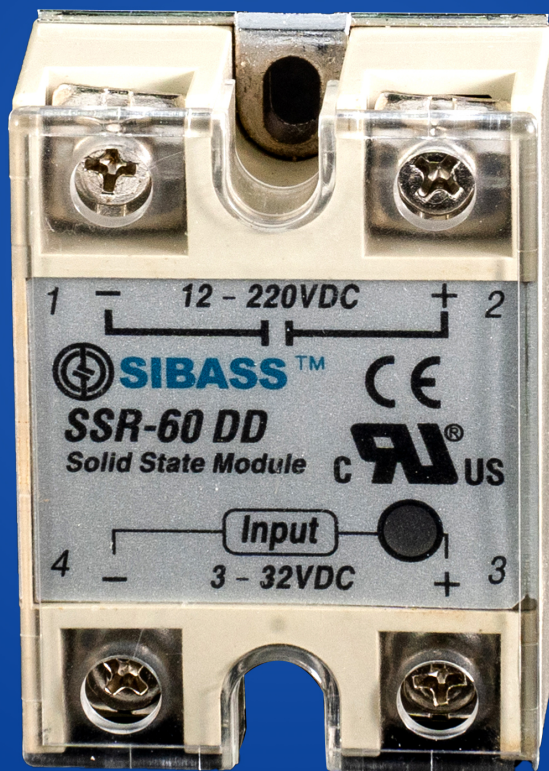

Operating temperature

SOLID STATE RELAY 60DD

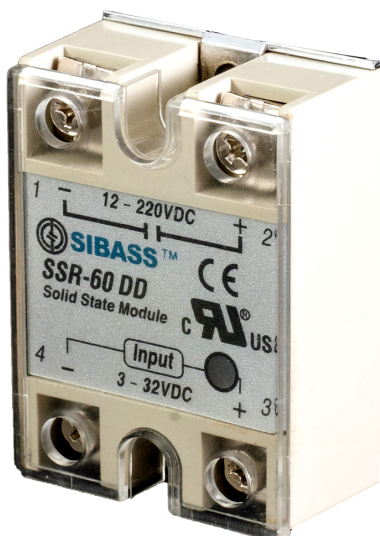

TECHNICAL DETAILS

Mode	SSR 60DD
Control voltage	3-32 VDC
Max control current	40 mA
Switch-on voltage	3 VDC
Switch off voltage	2 VDC
Load voltage	12-220 VDC
Peak load voltage	250 VDC
Load current	60 A
Max off-state leakage current	2 mA
Max on-state voltage drop	≤1 VDC
Dielectric strength(input to output)	100 g
Dielectric strength(input to output to base)	4000 V



Operating temperature

-30°C~80°C

Certification

CE

Terminals

Screw

Dimension

