




CE
ISO9001

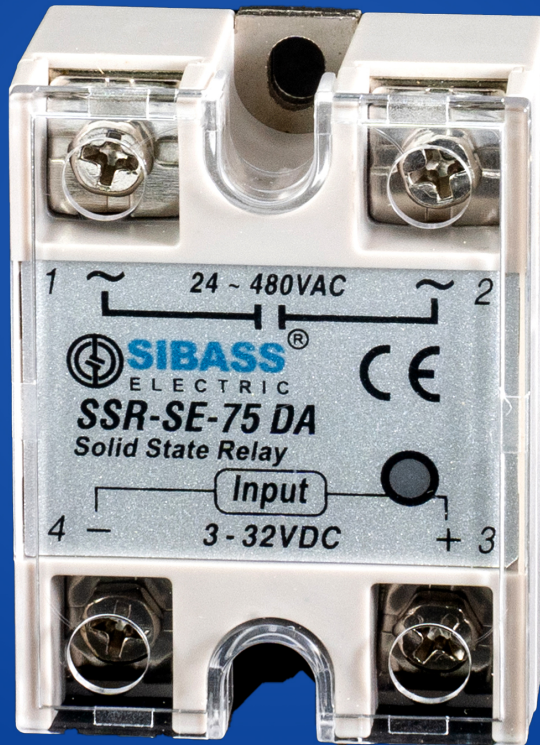

Trigger Voltage

SOLID STATE RELAY 75DA



TECHNICAL DETAILS

Model	SSR-75DA
Rated Load Current (A)	75
Trigger Voltage (VDC)	3-32VDC
Switching Voltage (VAC)	24 - 480VAC



Dimension

