

CE  
ISO9001



Insulation resistance



Operation Temperature

# SOLID STATE RELAY H3 100ZF




## TECHNICAL DETAILS

Load Current	60-120A
Input Voltage	3-32V DC
Max Input Current	12mA
Must Operation Voltage	2.8VDC
Must Release Voltage	1.5VDC
Output Voltage	24-480VAC
Peak Voltage	800V
Operation Temperature	-30°C to 60°C
Max off-state leakage current	≤2mA
Max on-state voltage drop	≤1.5V
On-Off Time	≤10ms
Insulation Resistance	1000MΩ
Certificates	CE



## Dimension

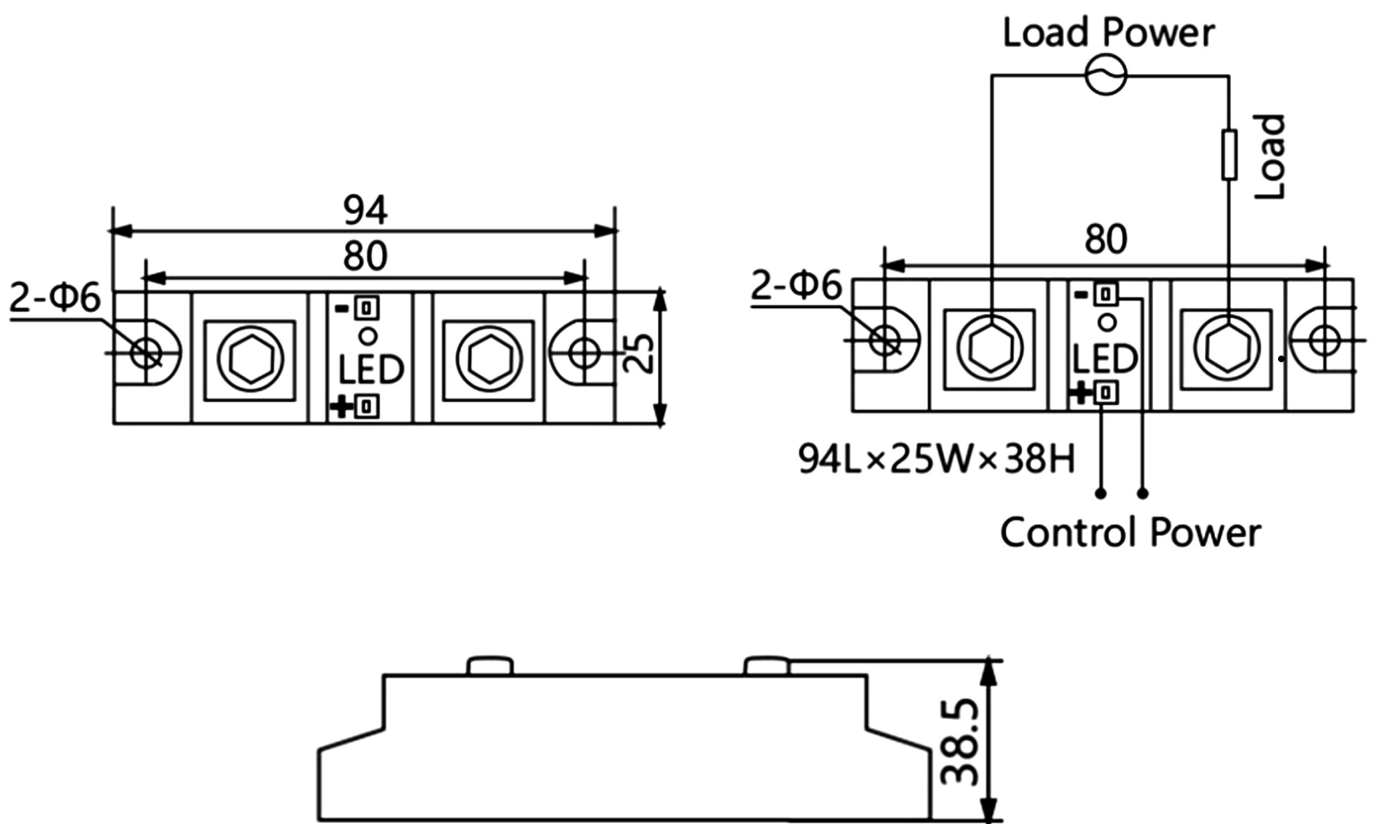

## Features

- With LED indicator.
- The default is zero cross SSR. Random turn-on needs to be customized.